


AL343PRODUCT INSTRUCTION MANUAL

Thank you for purchasing AL343. In order for you to properly install and maintain this product, please read this installation manual carefully before you install:


A Product Parameter:

Model	AL343
Frequency	50Hz
Rated Power	35W
Rated Voltage	AC220V
Heating Time	5-10 min
Temperature	45-60°C
Waterproof Grade	IPX4
Installation Mode	Plug-in
Heating Mode	Carbon Fiber Heating

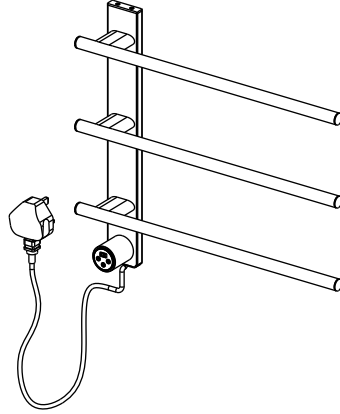

B Dimensional Drawing:

Unit: mm

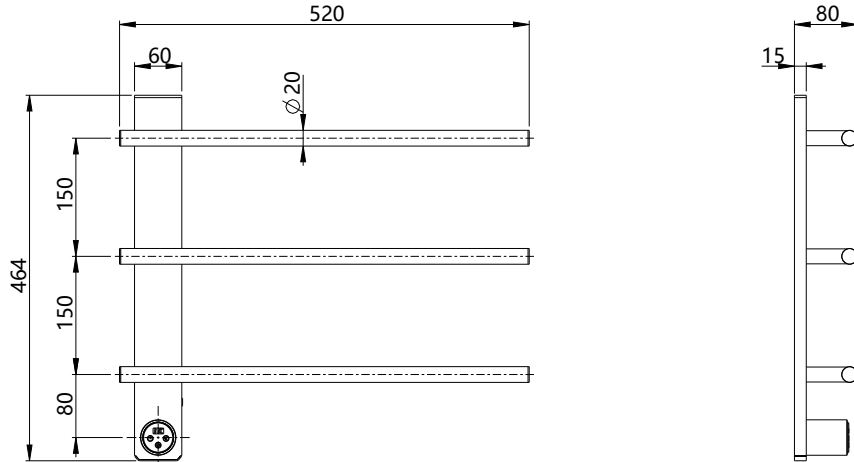

Packing Parts List

Name	Expansion stick	M4 Self-tapping screw	AL343 Towel Rack	2.5 Hex key	Fastening screw	Gloves	Specification	Product Certificate	Warranty card
Quantity	4 pieces	4 pieces	1 set	1 piece	/	1 pair	1 piece	1 piece	1 piece

AL343PRODUCT INSTRUCTION MANUAL

Thank you for purchasing AL343. In order for you to properly install and maintain this product, please read this installation manual carefully before you install: :

C Installation steps:

① Drill four 6MM mounting screw positioning holes on the wall at 1332.5mm above the ground according to the location and size shown in the figure.

Location of screw locating holes

6MM Mounting screw locating holes

20mm

16mm

28mm

1332.5mm

367.5mm

Floor

② Then insert the expansion stick into the hole.

Expansion stick

③ Then fix the upper and lower fixing piece close to the wall with self-tapping screws, press and adjust the level, and tighten the self-tapping screw, as shown.

Self-tapping screw

Upper fixing piece

Expansion stick

Lower fixing piece

Secure the negative with self-tapping screw Fasten and press down

④ Clamp the upper and lower install card slot of the electric towel rack to the fixed negative that has been fixed on the wall and stick to the wall.

Upper install card slot

Lower install card slot

⑤ Then, align the two screw mounting holes on the towel rack with the upper two threaded holes on the fixed film, tighten and lock them with M4X10 countersunk screws, and fix them firmly; Use M5X10 screws to lock the fixed plate of the lower install card slot.

M4X10

Wall

M5X10

⑥

- After completing the above steps, the entire product installation is finish;
- Turn on the power, press the switch, test for 15-30 minutes;
- Touch the bar careful, your hand should feel the bar slightly hot;
- After 30-40 minutes, touch the bar again, and the temperature is stable, and no longer rising, product can be use careful;
- Be sure to power off after the power-on test.

AL343PRODUCT INSTRUCTION MANUAL

Thank you for purchasing AL343. In order for you to properly install and maintain this product, please read this installation manual carefully before you install:

D Installation steps of Hardwired:

Reserve power cables about 1262.5mm above the ground. Determine the hole positions on the wall and adjust the horizontal position.

Hardwired Circuit Diagram
Reserve 86 switch bottom box and power control cable

Power

After connecting the power cord and the power reserve cable on the wall according to the positive and negative, insert the power cord into the base of the electric towel rack, and then clamp the hanging holes on the back of the product into the screws. (Then align the two screw mounting holes on the electric towel rack with the upper two threaded holes on the fixed negatives, tighten and lock them with M4X10 screws. It is the same as the suit). And close to the wall, lock.

Power cord

Clamp the hanging hole on the back of the product into the screw, and close to the wall, pull down to lock.

- After completing the above steps, the whole set of three-bar electric towel rack is installed;
- Turn on the power, press the switch, power test for 15-30 minutes;
- Touch the bar carefully, your hand should feel the bar slightly hot;
- After 30-40 minutes, touch the cross bar again, and the temperature is stable and no longer rises, and the product can be used normally;
- Be sure to power off after the power-on test.

Power On

- The controller power buzzer rings long to enter the standby state: only the "on/off" key icon gradually brightens - dimming changes, other lights and digital tube are not bright.
- In the standby state, long press the temperature key for 5 seconds to switch Celsius "--°C" ("°" is represented by decimal points, the same below), Fahrenheit "--°F" (factory default display temperature is Celsius), the successful setting of the buzzer long sound, set the memory and close the digital tube display back to the standby state; In the future, corresponding operations are displayed in this Celsius or Fahrenheit standard.
- "K1" "On/Off" key: Long press for one second to start the machine (the buzzer sounds for 2 times, display the last set time, default last set temperature), long press again for one second to shut down the machine (the buzzer sounds for 1 second, turn off the heating, turn off the display, only the power supply blink slowly).

Timing

- "K2" "Set Time off" key: In the startup state, press the setting time (buzzer short sound 1) "1H" (the first digit is off) to "8H" cyclic display.

Constant temperature

- "K3" "Constant temperature Setting" key: press and set the constant temperature (buzzer short sound 1 time) "45°C" (Fahrenheit "115") "50°C" (Fahrenheit "125"), "55°C" (Fahrenheit "135") cycle setting; Press the power-on state for 1 second to switch to: real-time temperature/timing time alternately display, set the successful buzzer long sound.

Troubleshoot

-Please troubleshoot according to the display on the screen

EE	No probes were connected
E0	Temperatures below 0°C.
E1	Temperatures above 99°C

