

AL201PRODUCT INSTRUCTION MANUAL



Thank you for purchasing AL201.In order for you to properly install and maintain this product, please read this installation manual carefully before you install:

A Product Parameter:

Model	AL201
Frequency	50Hz
Rated Power	60W
Rated Voltage	AC230V
Heating Time	5-10 min
Temperature	45-60°C
Waterproof Grade	IPX4
Heating Mode	Dry type heating
Installation Mode	Hardwired/Plug-in

B Dimensional Drawing:

Unit:mm

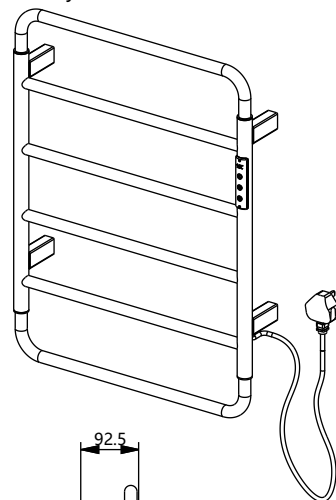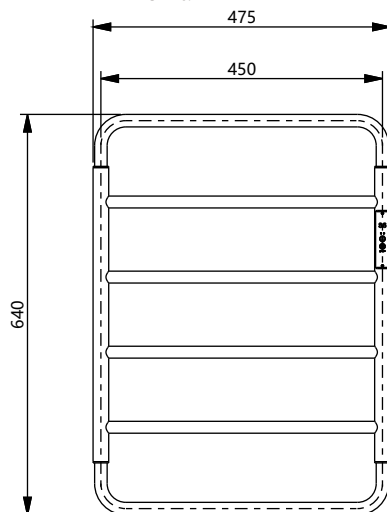

Packing Parts List

Name	Expansion stick	M4 Self-tapping screw	AL201 Towel Rack	2.5 Hex key	Fastening screw	Gloves	Specifica tion	Product Certificate	Warranty card
Quantity	4 pieces	4 pieces	1 set	1 piece	/	1 pair	1 piece	1 piece	1 piece

AL201PRODUCT INSTRUCTION MANUAL

Thank you for purchasing AL201.In order for you to properly install and maintain this product, please read this installation manual carefully before you install:

C Installation steps:

① Reserve power cables about 1235mm above the ground. Determine the hole positions on the wall and adjust the levels.

② Drill an 6MM round hole on the wall according to the location of the positioning hole of the mounting screw.

③ Then insert the expansion stick into the hole.

④ Use a screwdriver or a charging drill to load the above two self-tapping screws into the expansion glue rod, and adjust the gap between the screw head and the wall to be about 3.0mm; Fasten the rubber particles on the lower two bases with self-tapping screws and pay attention to adjusting the level.

⑤ Clamp the hanging hole on the back of the product to the screws and the outlet base mounting rubber particles, and close to the wall, pull down to lock.

⑥ Then use two M5X10 internal flat screws to lock the bottom two base feet. Adjust the horizontal position.


1. After completing the above steps, the entire product installation is finish;
2. Turn on the power, press the switch, test for 15-30 minutes;
3. Touch the bar carefully, your hand should feel the bar slightly hot;
4. After 30-40 minutes, touch the bar again, and the temperature is stable, and no longer rising, product can be use careful;
5. Be sure to power off after the power-on test.

AL201PRODUCT INSTRUCTION MANUAL

Thank you for purchasing AL201. In order for you to properly install and maintain this product, please read this installation manual carefully before you install:

C Installation steps of Hardwired:

Insert the expansion glue stick into the hole, and use a screwdriver or a charging drill to insert the self-tapping screw into the expansion glue stick. After the four mounting screws are installed, adjust the gap between the screws and the wall. After connecting the power cord and the power reserve cable on the wall, insert the power cord into the base of the electric towel rack, and then clamp the back hanging hole on the top of the product into the screw, and then close to the wall, pull down to lock. Clamp the product back hanging hole into the screw, and close to the wall, pull down to lock. Plug in the power socket. The installation is complete.

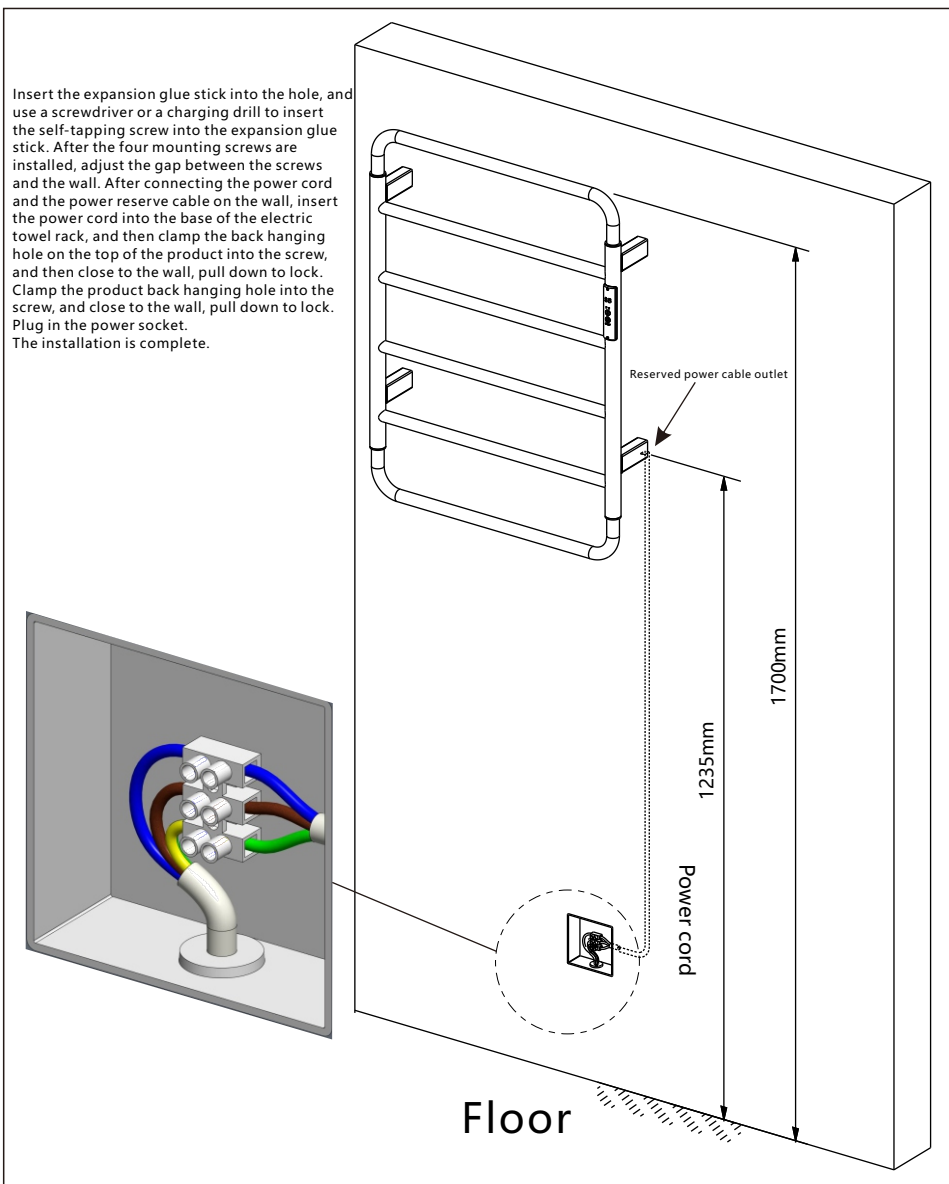

Smart Switch Instruction

Power On

- The controller power buzzer rings long to enter the standby state: only the "on/off" key icon gradually brightens - dimming changes, other lights and digital tube are not bright.
- In the standby state, long press the temperature key for 5 seconds to switch Celsius "°C" ("°" is represented by decimal points, the same below), Fahrenheit "°F" (factory default display temperature is Celsius), the successful setting of the buzzer long sound, set the memory and close the digital tube display back to the standby state; In the future, corresponding operations are displayed in this Celsius or Fahrenheit standard.
- "K1" "On/Off" key: Long press for one second to start the machine (the buzzer sounds for 2 times, display the last set time, default last set temperature), long press again for one second to shut down the machine (the buzzer sounds for 1 second, turn off the heating, turn off the display, only the power supply blink slowly).

Timing

- "K2" "Set Time off" key: In the startup state, press the setting time (buzzer short sound 1) "1H" (the first digit is off) to "8H" cyclic display.

Constant temperature

- "K3" "Constant temperature Setting" key: press and set the constant temperature (buzzer short sound 1 time) "45°C" (Fahrenheit "115") "50°C" (Fahrenheit "125"), "55°C" (Fahrenheit "135") cycle setting; Press the power-on state for 1 second to switch to: real-time temperature/timing time alternately display, set the successful buzzer long sound.

Troubleshoot

-Please troubleshoot according to the display on the screen

E1	No probes were connected
E2	Temperatures below 0°C.
E3	Temperatures above 99°C

